FLOOR PLAN FOR 735050 PORTABLES

735050 TIE-DOWN LAYOUT

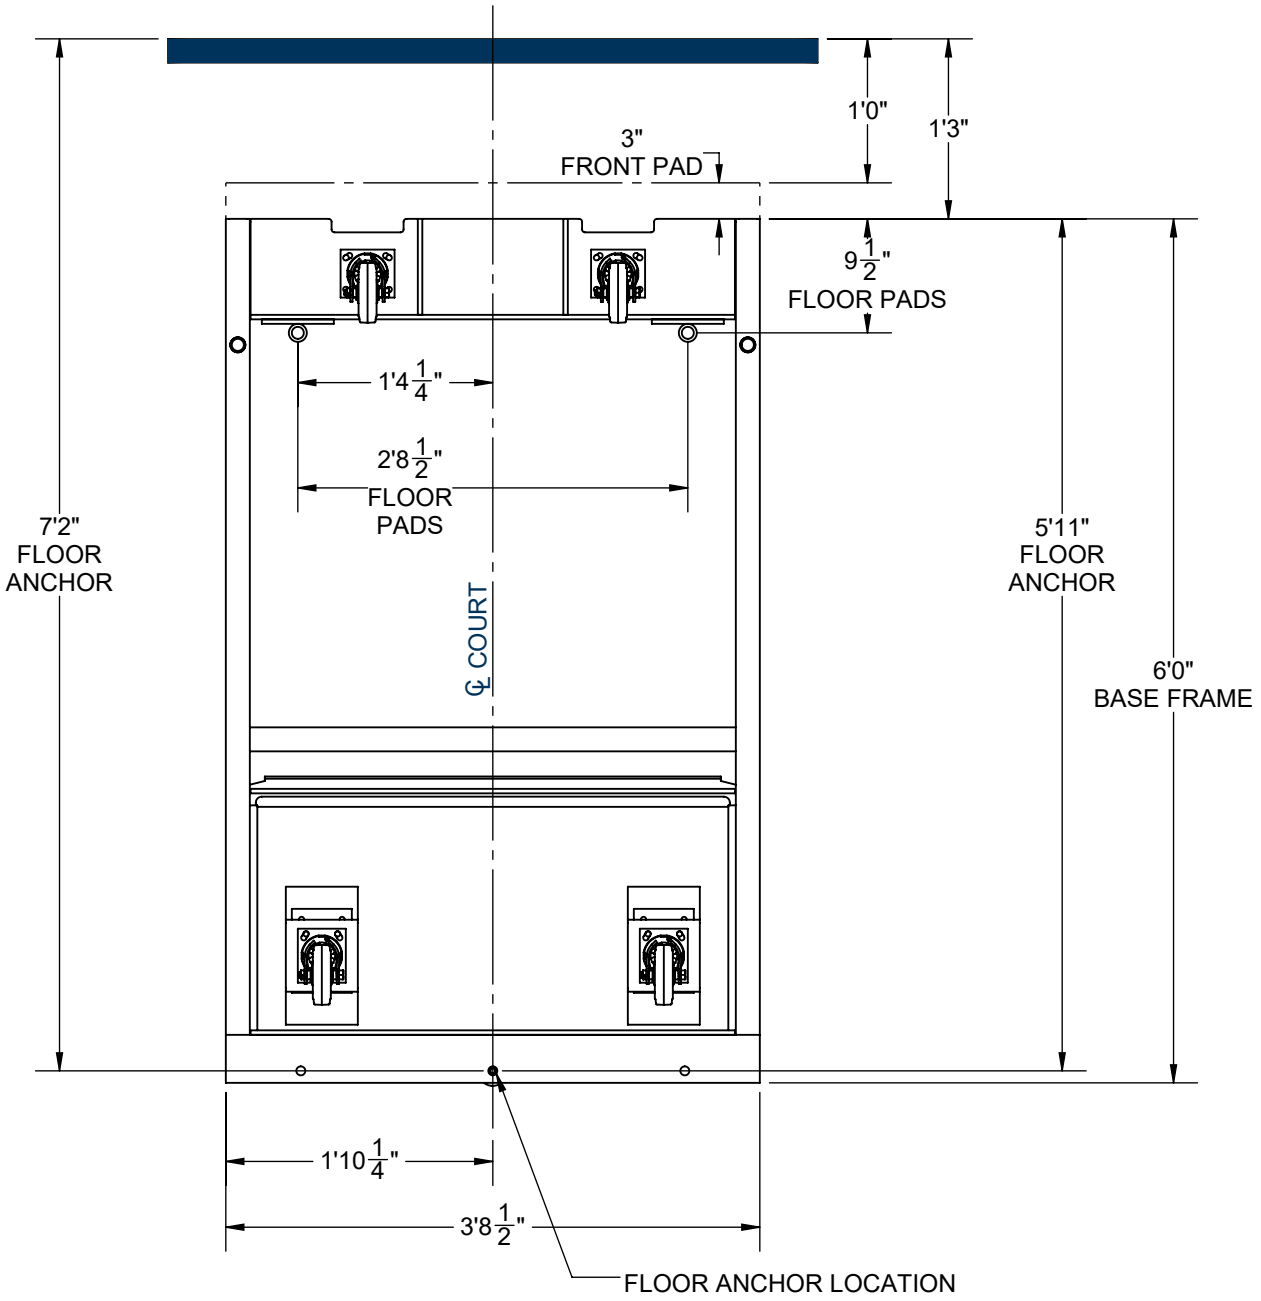

FLOOR ANCHOR KIT (SPECIFY)	
FITG00470	EXPANSION-TYPE (00247-100)
FITG00471	SLEEPER-TYPE (00244-000)
FITG00472	PORTABLE FLOOR-TYPE (00242-900)
FITG00473	THIN CONCRETE-TYPE (00242-100)
FITG00474	CAST-IN-SLAB TYPE (00247-000)

_____ - FLOOR ANCHOR KIT; OPTIONAL

FITG00300 - LOCATOR CUP KIT; OPTIONAL - QUANTITY DESIRED _____

PROJECT NUMBER _____

PROJECT NAME _____

888-277-7778 PORTER@PORTERATHLETIC.COM

© COPYRIGHT 2024 PORTER ATHLETIC - ALL RIGHTS RESERVED

WWW.PORTERATHLETIC.COM/FACILITY

BASKETBALL SPECIFICATION SHEET

B-736-10

5/14/2024

FLOOR PLAN FOR 735050 PORTABLES

735050 TIE DOWN SYSTEM

SPECIFICATIONS

Tie-down system shall conform to the requirements as stipulated in the latest NCAA recommendation No. BR-22, Section II (dated July, 1992) which states “Portable back boards shall be secured to the floor so as to prevent movement”.

Tie-down system shall consist of one (1) unitized steel, 1/2"-13 threaded rod with hand wheel which mounts through the base frame of the portable and into one (1) floor anchor (optional). Specify floor anchor kit by floor type. (Kit No. FITG00470 or No. FITG00471 recommended for anchorage into concrete slab.)

Front of base shall be furnished with two pressure lock type floor pads that lock goal at competition 10'-0" height setting and lift base off of front casters. Floor pad locating cups and No. 00242000 floor anchors that maintain the position of the unit on the playing floor may be added with the optional FITG00300 kit.

ISSUED MAY 14, 2024, SUBJECT TO CURRENT MANUFACTURING PROCEDURES AND CHANGES
COPYRIGHT 2024 - PORTER ATHLETIC - ALL RIGHTS RESERVED
PORTER@PORTERATHLETIC.COM