INSTALLATION INSTRUCTIONS

SHOT CLOCK SUPPORT (EACH)

No. SCS00112 for 6-5/8" Dia. Backstop Mast

This adjustable shot clock support kit is used to suspend a shot clock from a Porter 6-5/8"∅ ceiling-suspended basketball backstop mast with or without a camber. It accommodates shot clocks with a width between 20" and 32" (rear-mount) or 30" (side-mount), and with a maximum height of 28". For installation details, see Detail "A" for shot clocks with rear mounting holes, and Detail "B" for shot clocks with side mounting holes.

PARTS LIST

Item No.	Part No.	Qty.	Description	Item No.	Part. No.	Qty.	Description
1	FRME 00394 027 2	1	Shot Clock Support Tube	8	HDWE 03012 0E0	2	5/8" Hex Nut
2	FRME 00400 036 2	1	Shot Clock Support Base Channel	9	HDWE 01124 0E0	4	3/8" x 1" Lg. Hex Head Cap Screw (Grade 5)
3	FRME 00399 028 L2	1	Shot Clock Support Upright	10	HDWE 01204 0E0	4	3/8" x 1-3/4" Lg. Hex Head Cap Screw (Grade 5)
4	FRME 00399 028 R2	1	Shot Clock Support Upright	11	HDWE 04002 0E0	8	3/8" Lock Washer
5	CLMP 00007 002	2	Half Clamp	12	HDWE 03002 0E0	4	3/8" Hex Nut
6	UBOT 00006 0E2	1	5/8" U-Bolt	13	HDWE 03057 0E0	4	3/8" Channel Nut
7	HDWE 04006 0E0	2	5/8" Lock Washer	14	PCAP 00014 002	1	2-3/8" Tube Cap

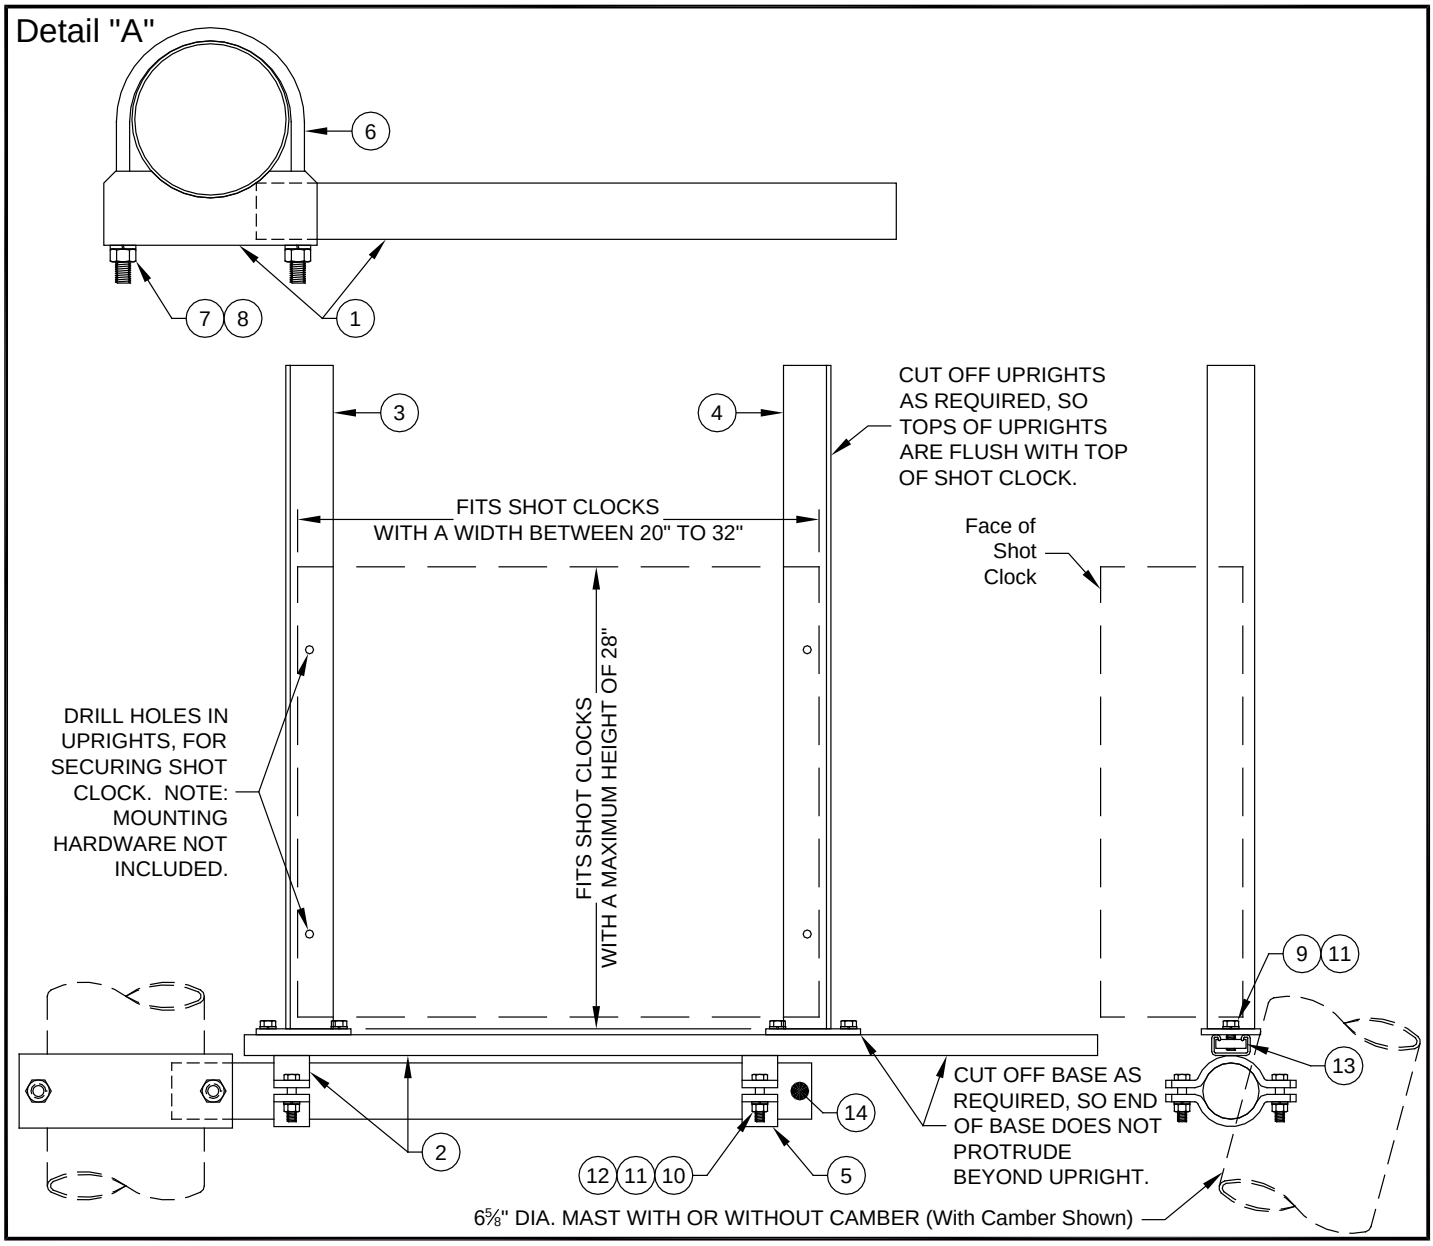

© 2008 PORTER ATHLETIC, INC. ALL RIGHTS RESERVED.

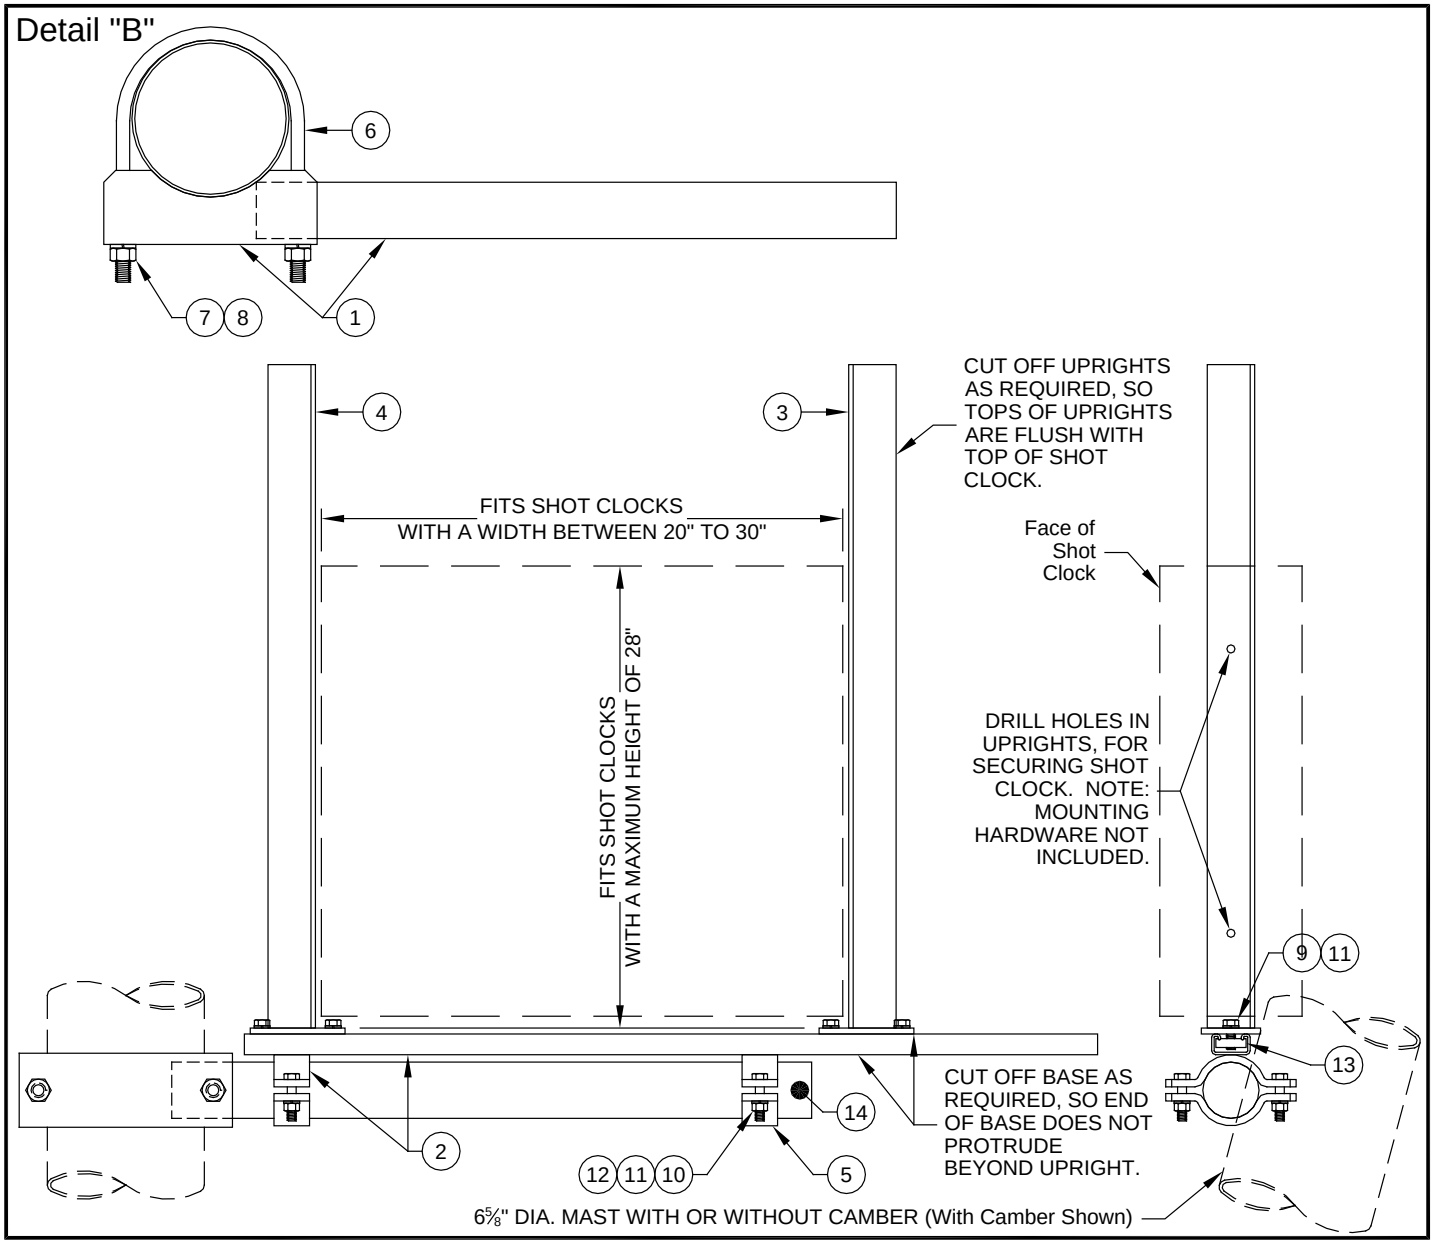

THIS WARNING IS GIVEN IN COMPLIANCE WITH CALIFORNIA'S PROPOSITION 65:

WARNING

This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

Porter Athletic, Inc.
2500 South 25th Avenue, Broadview, IL U.S.A., 60155
Toll Free: (888) 277-7778 • Phone: (708) 338-2000 • Fax: (708) 338-2060
www.porterathletic.com

SAVE THESE INSTRUCTIONS FOR FUTURE USE