BATTING CAGES

No. 330150 - 50' Long

No. 330170 - 70' Long

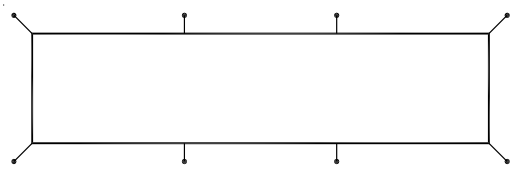

No. ***330150***
BATTING CAGE - 50' Long

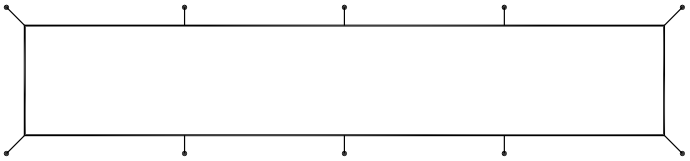

No. ***330170***
BATTING CAGE - 70' Long

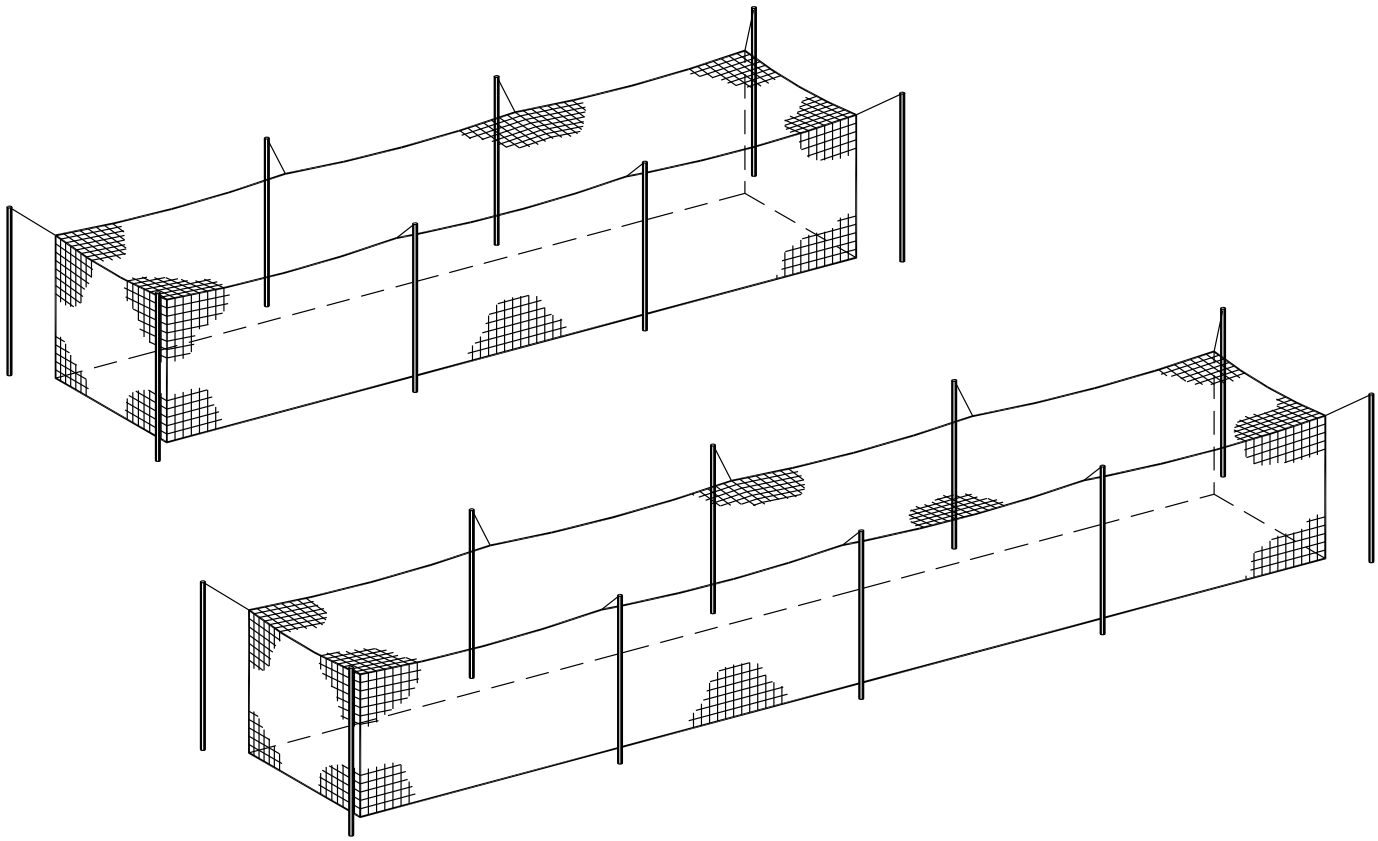

Upon completion of the assembly/installation of this kit, make sure this instruction sheet is in the possession of the owner or facility manager, to save for future reference, and to order replacement parts.

Copyright © 2017 by Litania Sports Group, Inc. All rights reserved.

INST00333078
12-13-2017

No. 330150 – Batting Cage – 50' Long
No. 330170 – Batting Cage – 70' Long
INSTALLATION INSTRUCTIONS

⚠ WARNING

- READ ALL CAUTIONS AND WARNINGS THOROUGHLY BEFORE USING THIS EQUIPMENT.
- FAILURE TO COMPLY WITH THE FOLLOWING INSTRUCTIONS, CAUTIONS AND WARNINGS MAY RESULT IN SERIOUS INJURIES AND/OR PROPERTY DAMAGE.
- THE No. 330150 AND 330170 BATTING CAGES ARE DESIGNED TO PROVIDE LIMITED PROTECTION FOR SPECTATORS. HOWEVER, STRICT SAFETY PRECAUTIONS AND ADULT SUPERVISION MUST BE OBSERVED AT ALL TIMES TO MINIMIZE THE POSSIBILITY OF ACCIDENTAL INJURIES.
- SPECTATORS MUST BE INSTRUCTED TO STAND A SAFE DISTANCE FROM THE NETTING WHEN THE BATTING CAGE IS IN USE, TO AVOID THE POSSIBILITY OF BODILY CONTACT WITH BALLS, BATS OR OTHER EQUIPMENT.
- THE OWNER OF THIS EQUIPMENT IS RESPONSIBLE TO ENSURE THAT ALL INDIVIDUALS FOLLOW THESE SAFETY AND OPERATING INSTRUCTIONS TO AVOID INJURIES OR PROPERTY DAMAGE. PROPER USE AND SUPERVISION OF THIS EQUIPMENT IS ESSENTIAL TO HELP REDUCE THE POSSIBILITY OF ACCIDENTS OR INJURIES.

⚠ WARNING

READ ALL INSTRUCTIONS THOROUGHLY BEFORE ATTEMPTING TO ASSEMBLE THIS EQUIPMENT. ASSEMBLY OF THIS EQUIPMENT MUST BE DONE BY PHYSICALLY CAPABLE ADULTS ONLY.

PARTS LIST

Item No.	Part No.	330150 Quantity	330170 Quantity	Description
1	UPRT 00326 100	8	10	Batting Cage Upright
2	PCAP 00061 002	8	10	End Cap
3	ROPE 00103 002	8	10	Hoist Rope Assembly
4	PULY 00015 0G0	8	10	Pulley
5	HDWE 58026 0E0	8	10	S-Hook
6	HDWE 07023 0E0	8	10	Eye-Bolt
7	HDWE 03013 0E0	8	10	5/16" Lock Nut
8	ROPE 00008 0G0	8	10	Rope Cleat
9	HDWE 06009 0E0	16	20	1/4" x 1-1/2" Lg. Flat Head Machine Screw
10	00330059	1		Batting Cage Net – 50' Long
10	00330079		1	Batting Cage Net – 70' Long
11	00418080	2	3	Net Tie-Down Stakes (Set of Eight)

1. Check all parts against Parts List on Page 2 to make sure all have been included.

2. Begin by assembling uprights. At top end, insert eye-bolt (6) into hole thru upright (1). Secure with 5/16" locknut (7). Note - the eye must be in the horizontal position. Tighten the locknut after rotating the eye-bolt. See Detail "A".

3. Assemble pulley (4) and s-hook (5) to eye-bolt assembly (6) from Step No. 2. Crimp both ends of s-hook completely closed, to prevent removal of pulley. See Detail "A".

4. Install end cap (2) onto top end of upright (1). See Detail "A".

5. Each upright (1) has one set of tapped holes on one side of the upright. A rope cleat (7) is assembled to each upright at these tapped holes, with 1/4" x 1-1/2" lg. flat head machine screws (9). See Detail "A".

Detail "A"

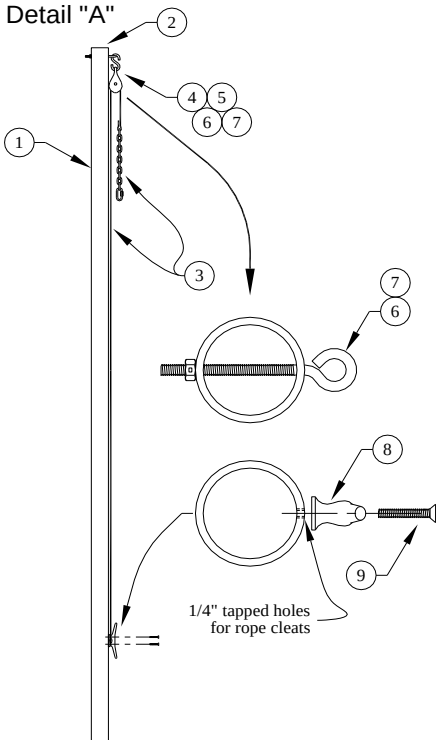

If batting cage uprights are being used with outdoor ground sleeves or indoor floor sleeves, follow the installation instructions provided with the sleeves. If batting cage uprights are being installed permanently into concrete footings, proceed to Step No. 6 below.

6. Locate and dig footings for each upright. CAUTION – Contact your local utility companies to locate buried electrical, gas and water lines before digging holes for footings. Also, check for overhead utilities. See Detail "B" for footing details, and Detail "D" for footing locations.

Detail "B"

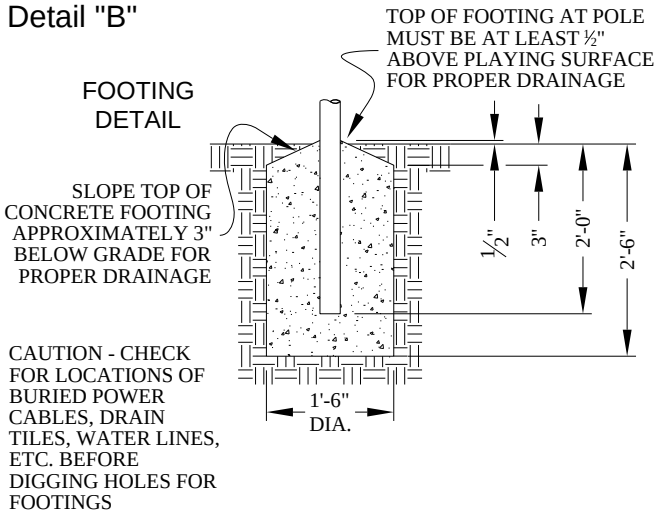

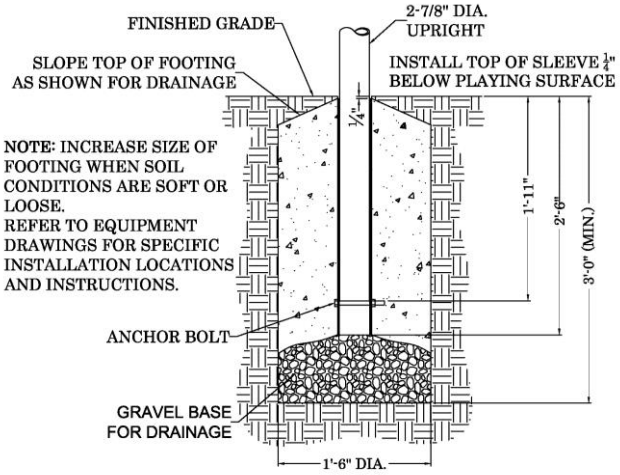

The footer size is to be determined by the architect/engineer and is based on local codes and soil conditions.

7. Raise the assembled batting cage uprights into position in their holes, according to the dimensions shown in Detail “D”. The four corner uprights are positioned at a 45° angle, with the rope cleats and pulleys pointed toward the batting cage. All intermediate upright assemblies are rotated square with the cage, pointing toward each other. Support each upright assembly at the proper location and height in the hole, by clamping 2x4’s, etc. to the uprights. The bottom 2’-0" of each upright will be below grade, with the top of the upright approximately 11'-8" above grade. See Detail “C”.

8. Check once more the position, rotation and height of each upright, and check that the upright is plumb. After doing so, pour the concrete footings.

9. Allow the concrete footings to cure for a minimum of three days before assembling the hoist rope assemblies (3) to the uprights.

10. Feed the plain end of the hoist rope assembly (3) thru the pulley assembly on the upright. See Detail “C”. The lower end of the hoist rope assembly should be knotted to the rope cleat on the upright assembly, for a permanent installation. Repeat for all batting cage upright assemblies.

11. Assembly of the batting cage uprights is now complete

12. Secure the batting cage net to the batting cage uprights. Prior to doing this step, consult with the customer as to where the Velcro access opening should be located. See Detail “D” for alternate locations for Velcro access opening.

13. Extend each hoist rope assembly (3) and attach to the batting cage net by hooking the quick-links thru the grommets or loops on the net. Be sure to close each quick-link. Pull down on each rope until the bottom of the net is just touching the ground, and wrap the rope around the rope cleat until it is secure. See Detail “C”. Pull evenly on all hoist rope assemblies, so that the net remains in the center of the cage.

Detail "C"

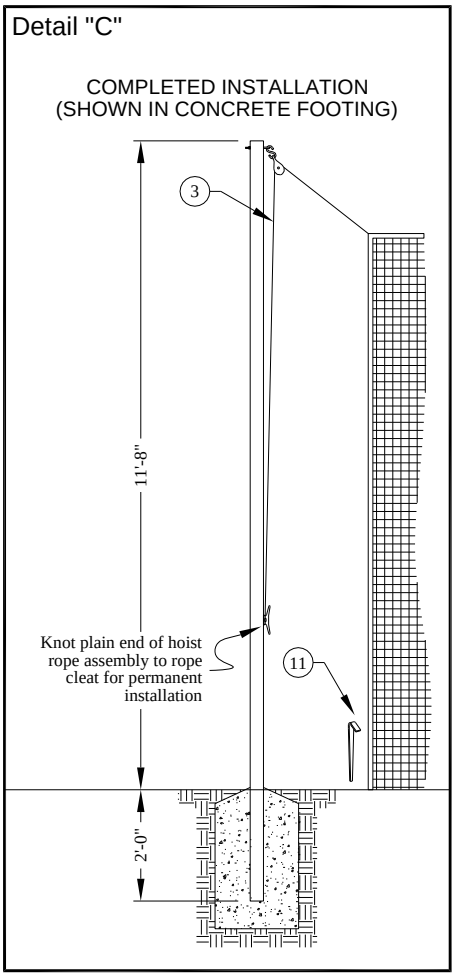

14. Secure the bottom of the net to the ground, with the tie-down stakes supplied (11).

THIS WARNING IS GIVEN IN COMPLIANCE WITH CALIFORNIA’S PROPOSITION 65:

WARNING

This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

BATTING CAGE LAYOUT AND UPRIGHT LOCATIONS

No. 330150 BATTING CAGE
50'-0" LONG

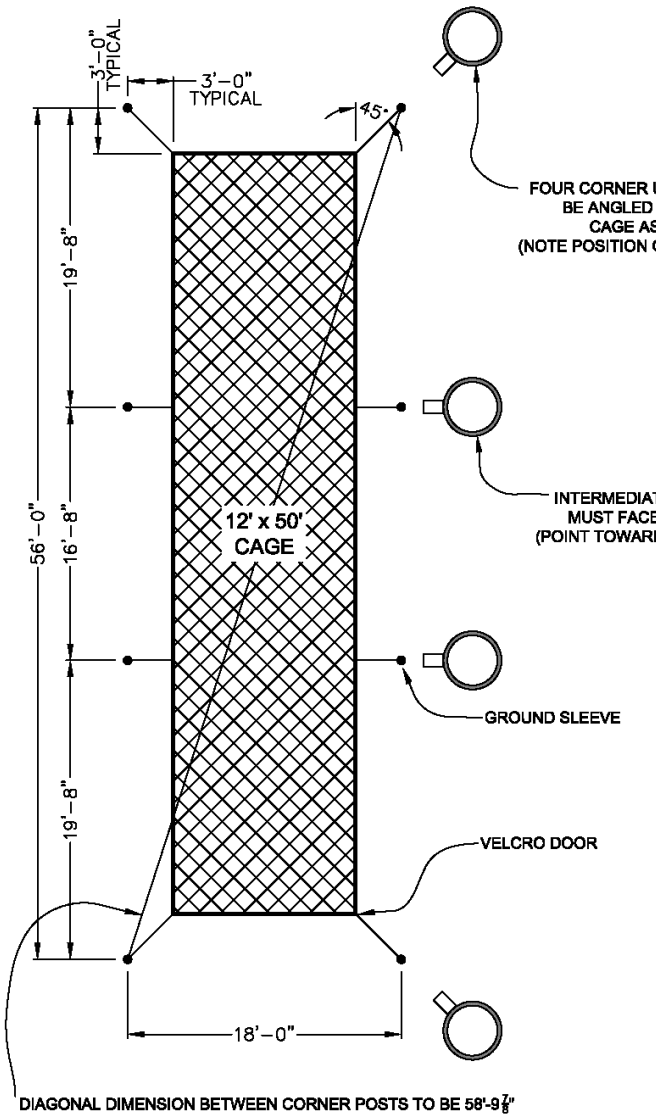

NOTE: NET CAN BE ROTATED SO VELCRO DOOR IS IN THE OPPOSITE CORNER

No. 330170 BATTING CAGE
70'-0" LONG

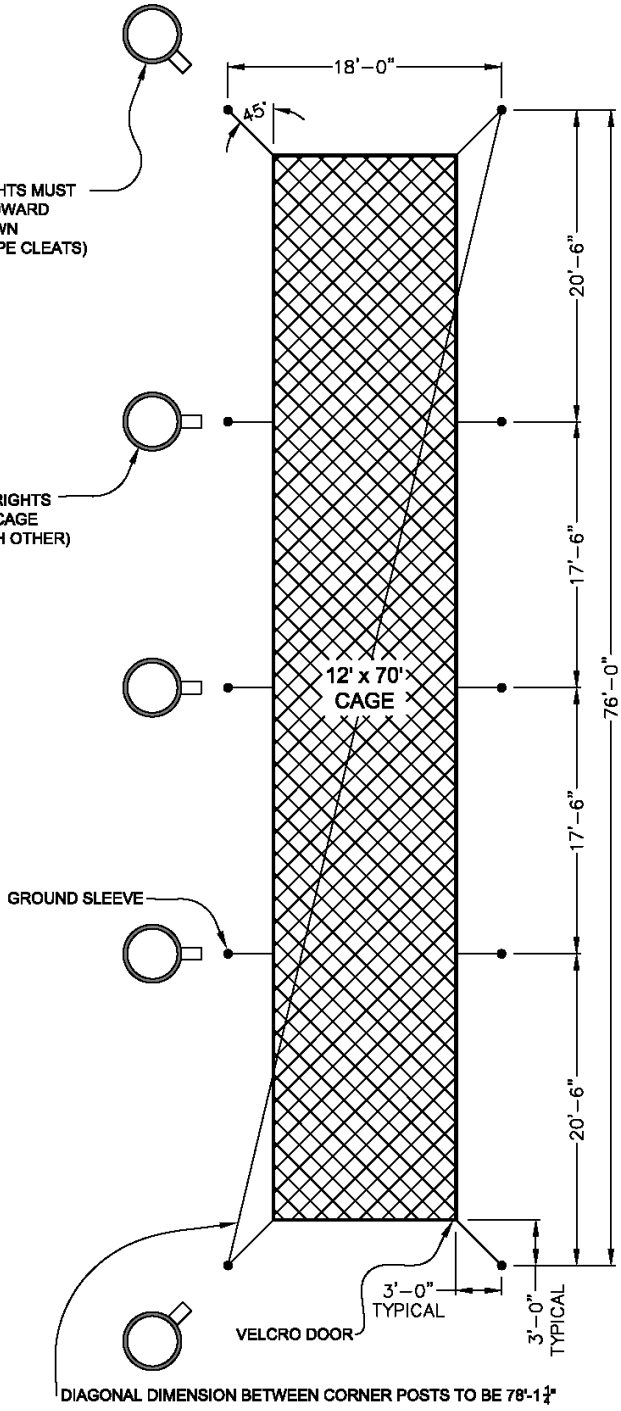

GILL ATHLETICS

Copyright © 2017 by Litania Sports Group, Inc. All rights reserved.

SAVE THESE INSTRUCTIONS FOR FUTURE USE